

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/004059 A1

- (51) International Patent Classification⁷: **H01P 1/18**
- (21) International Application Number:
PCT/GB2003/002743
- (22) International Filing Date: 27 June 2003 (27.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0215087.8 29 June 2002 (29.06.2002) GB
- (71) Applicant (for all designated States except US): **ALAN DICK & COMPANY LIMITED** [GB/GB]; The Barlands, London Road, Cheltenham, Glos GL52 6UT (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **CHRISTOPHER, Davies** [GB/GB]; 4, St. Michaels Road, The Woodlands, Cheltenham, Glos GL51 3RR (GB).
- (74) Agents: **DUNLOP, Brian, Kenneth, Charles et al.**; Wynne-Jones, Laine & James, 22 Rodney Road, Cheltenham, Glos GL50 1JJ (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: A PHASE SHIFTING DEVICE

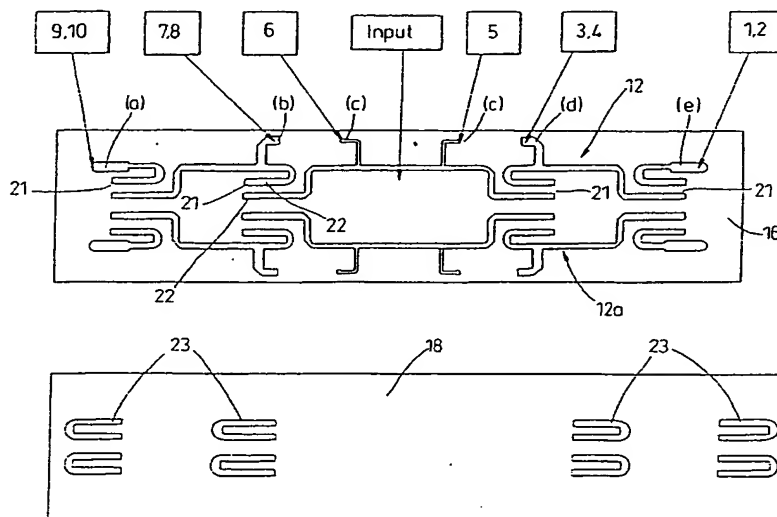

(57) Abstract: This invention relates to a phase shifting device, which generally comprises of rigid chassis, in the form of an aluminium plate, which can form a ground plane for feed lines (12) printed on a printed circuit board (16), which is mounted on the chassis, a rigid RF transparent block, which is fixed to an actuator arm and mounting bolts for slidably mounting block and actuator on the chassis. A flexi circuit, or the equivalent, (18) is attached to the block and is printed with generally c-shaped conductive strips (23), which form connections at open parts of the feed lines, in such a manner that movement of the block will cause changes in the effective lengths of the feed lines (12) and hence the relative phases of antennas fed by those feed lines.

BEST AVAILABLE COPY



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

"A Phase Shifting Device"

This invention relates to a phase shifting device for an array of antenna elements and in particular, but not exclusively, to a ground-tilting antenna including such an array.

5 For a variety of reasons it may be desirable to induce and adjust the phase difference between signals emitted from a plurality of antenna elements in an array and one particular example of this is when the array forms a ground tilting antenna. It is well known by designers of wireless cell networks, such as mobile phone networks, that there is a continuous compromise to be made
10 between coverage, capacity and quality. Maximum coverage is achieved by emitting a horizontal beam, but in periods of peak capacity it is found that there is often interference or calls simply dropping off, with such an arrangement. In general, therefore, antenna are tilted downwardly by about 5°. It has, however, been appreciated that even a fixed tilt is not ideal, because it does not allow for
15 changes in usage within the cell either on a short-term basis or a long-term basis. Many aerials are therefore mounted on the system which can mechanically alter the tilt of the aerial, but these require an engineer to visit the site and they often require the antenna to be switched off during adjustment.

Proposals have, accordingly, been made to alter the tilt of the radiating
20 beam electrically by inducing phase changes along the length of the array corresponding to tilts of various angles. However, these have tended to introduce their own mechanical and control complexities. For example, in WO 01/03233 a phase shift system is described in which the phase is altered by altering the line length for any given antenna by varying the insertion or
25 withdrawal of generally C-shaped conductor portions lying within, but not touching, folded conductors that form part of the line. This requires fabrication and assembly to a fine degree of tolerance and the mechanical arrangements

for achieving continuous adjustment of the phase in different senses in different parts of the array in a co-ordinated manner are complex. Other approaches are to use moveable dielectric bodies such as described in US-A-2002/0003458 or a slidable T-junction arrangement as described in US-A-5801600. In each case the construction is complex and co-ordinated alteration of the phase shifts is difficult to obtain.

From one aspect the invention consists in the phase shifting device of an array of antenna elements having respective antenna feed lines formed on a printed circuit board with respective open circuits formed therein, the device including a body slidable relative to the printed circuit board and carrying a plurality of conductive strips for forming a RF connection across respective open circuits, the strips being formed such that any given feed line is lengthened by movement of the element in one direction and shortened by movement in an opposite direction.

Conveniently the conductive strips are generally C-shaped and there may be one set of conductive strips which are oppositely sensed from another set, such that on movement in one direction, the one set of strips moves to lengthen their respective feed lines, whilst the other set shorten their respective feed lines. The conductive strips are preferably capacitively connected to their respective feed lines.

The body is preferably a rigid RF transparent block and the conductive strips may be printed on the surface of the block or they may be formed on a circuit that is fixed to the block, with the body of the circuit interposed between the block and the printed circuit board so that there is no friction on the conductive strips to damage them. A lamination process may be used. Alternatively a thin dielectric sheet or coating may be interposed.

The invention further includes a phase changing assembly including a printed circuit board for an array of antenna elements, the board having respective antenna element feed lines formed thereon, each feed line having an open circuit formed therein, a phase shifting device as claimed in any one of the preceding claims with the body slidably mounted with respect to the printed circuit board and an actuator for causing slidable movement.

Preferably the printed circuit board is elongate and the body is moveable in the longitudinal axial path, which incorporates the one and the other direction movement defined above.

The invention still further includes a ground tilting antenna array comprising assembly as claimed above where the antenna elements are mounted in the vertical elongate array with the upper antenna elements connected to the feed lines whose length is lengthened when the body is moved in the one direction and the lower antenna elements connected to the feed lines whose length is shortened when the body is moved in the one direction whereby a phase shift can be caused along the length of the array.

Although the invention has been defined above it is to be understood that it includes any inventive combination of the features set out above or in the following description.

The invention may be performed in various ways and specific embodiments will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a view from above of the main operative portion of a phase changing assembly;

Figure 2 is an enlarged view from above and to one side of the assembly;
Figure 3 is a view from above of the printed circuit board of the assembly;
Figure 4 is a view from above of the slider circuit of the assembly; and

Figure 5 is a schematic view of an antenna array.

Turning to Figure 5, the antenna elements, which form an array 1 to 10, from one side of a dual polar array are schematic illustrated. A corresponding set (not shown) will be provided in a dual polar array to radiate the other polarisation. The elements 1 to 10 are arranged in pairs and each pair (eg 1,2) radiates with the same phase. The antenna elements 1 to 10 are connected to an input 11 by bifurcating feed lines 12 that include phase shifting devices 13, which are located in the feed lines 12 so that a respective individual phase shift, with respect to the pair 5,6, can be induced in each other pair of antenna elements. Thus, in the arrangement indicated in Figure 5, if antenna elements 5,6 are taken to have zero phase, antenna elements 3,4 are shifted in the negative sense by one phase unit, whilst 1,2 are shifted negatively by two phase units. Conversely, 7,8 are positively shifted by one phase unit and 9,10 are positively shifted by two phase units. By inducing a phase distribution of this type along the array one can vary the effective down tilt of a ground-tilting antenna, which is nominally electrically preset (by means of phased cable lengths) at a 5° down tilt, from between 0 to +10°.

Turning now to Figures 1 to 4, the Applicants' preferred construction for obtaining such a phase shift will be described.

As can best be seen in Figures 1 and 2, a phase shifting device is generally indicated at 14 and generally comprises a rigid chassis 15, in the form of an aluminium plate, which can form a ground plane for the feed lines 12 pinned on a printed circuit board 16 which is mounted on the chassis 15, a rigid RF transparent block, eg of polycarbonate, or a circuit substrate 17, which is fixed to an actuator arm 19 and mounting bolts 20 for slidably mounting the block 17 and actuator 19 on the chassis 15. A circuit 18, which can be a flexi

circuit can just be seen attached to the block 17; this may also be etched back into the block 17.

Turning to Figure 3, feed lines 12 are shown printed on the printed circuit board in a conventional manner. They can be microstrip as illustrated or stripline or coplanar wave guides or any other suitable transmission line. The lines may be printed, etched or formed on the board 16. It will be seen that the feed lines patterns 12 are completely symmetrical, to accommodate the dual polar antenna array and the arrangement will be described in connection with one side of the array only. As with Figure 5, a duplicate set of antenna elements, operated on the opposite polarisation, would be connected to the corresponding points on the other set of feed lines 12a. As can be seen, each antenna element is attached to a connection point, which are identified by respective letters a to e and these corresponding points are marked on the Figure 5. Upstream of points a, b, d and e are respective open circuits 21 which are constituted by a gap between two parallel sections of track 22. It will be noted that the parallel tracks 22, which are connected to points a and b, point in the opposite direction to those connected to points a and e and that in all cases they lie parallel to the longitudinal axis at the elongate printed circuit board 16.

Turning to Figure 4, the slider circuit 18 carries generally C-shaped conductive strips 23. It will be noted that each strip 23 points towards the centre of the slider circuit 18 and so those at the left hand side face oppositely to those at the right hand side. As is indicated in Figure 2, this circuit 18 is adhered along the underface of the rigid block 17. Thus it is held in a position where the strips 23 overlie the arms 22 to form a capacitive RF connection across the open circuits 21 and it will further be understood that the degree to which the arms of the strips 23 overlie the arms 22 determines the length of the feed line at that particular point and hence the phase shift created by the feed line. Accordingly,

by sliding the rigid block 17 and hence the circuit 18 axially with respect to the printed circuit board the length of the feed lines connecting to points a, b, d and e can be lengthened or shortened dependent on the extent and direction of that movement. Thus if the block 17 moves from right to left the feed line connecting to points a and b are extended as the strips 23 move relative to the arms 22 in the manner of a slide being pulled out on a trombone, whilst at the same time, because of the opposite sensing of the strips 23 on the right hand side of the circuit 18, the feed lines connected to points d and e are effectively shortened, as is the air path in the trombone when the slide is pushed into the tubing. Thus when that movement takes place the phase shifts indicated in Figure 5 occur. As the movement is taking place with a single block the phase change relative to each portion of the feed line 12 is the same and so the stepped phase changes indicated in Figure 5 are readily and routinely obtained. Alternatively the phase changes are continuous.

It will be noted that the only movement that needs to be achieved is the movement of the single block 17 and so no complex ganging or gearing needs to take place, nor is there any chance of mechanical wear or slackness introducing error. As the circuit 18 is adhered to the rigid block 17 with the conductive strips 23 adjacent the block 17 all the sliding takes place on the undersurface of the circuit, which can be coated with PTFE and the strips 23 are not subjected to wear. The upper surface of the printed circuit board 16 can also be lubriciously protected by being covered with a thin PTFE layer.

The rigid block 17 can be mounted in any suitable manner, but the Applicants have found that the arrangement illustrated is particularly convenient. This comprises a number of bolts 20 which are screwed through openings in the printed circuit board 16, into the chassis 15 along the central axis thereof. These bolts extend through slots 24 in the arm 19 to define precise linear travel

for the arm 19 and hence the block 17. The bolts can be adjusted so that there is sufficient friction between the underside of the slider circuit 18 and the printed circuit board 17 for any particular position to be retained frictionally. Continuous adjustment of the phase is therefore available. Preferably the linear movement of the arm 19 is achieved by a stepper motor (not shown) acting on a remote end thereof so that the phase shift can be adjusted remotely, so the effective ground tilt angle of the array can be achieved, either at ground or, even more preferably, from a remote control station. Often the adjustment will be made to reflect changing traffic profiles over a period of weeks or months, but the system is equally capable of allowing changing angles throughout a pre-set daily pattern, in the manner of traffic light delays, so that, for example, antennas near roads, carrying rush hour traffic, may require a greater down tilt during peak periods than at other times or, it could be a real time adjustment which reflects the traffic being handled by any particular array at any particular time.

The circuit illustrated is designed for 1710 to 2170 MHz wideband operation, when connected to wideband antenna elements. However, it can be scaled to other frequency bands eg 800 MHz to 1GHz, by those skilled in the art.

CLAIMS

1. A phase shifting device for an array of antenna elements having respective antenna feed lines, formed on a printed circuit board, with respective open circuits formed therein, the device including a body slidable relative to the printed circuit board and carrying a plurality of conductive strips for forming an RF connection across respective open circuits, the strips being formed such that any given feed line is lengthened by movement of the body in one direction and shortened by movement in an opposite direction.

2. A device as claimed in claim 1 wherein the conductive strips are in the form of strips.

3. A device as claimed in claim 1 or claim 2 wherein the set of conductive strips is oppositely sensed from another set, such that on movement in the one direction the one set of strips move to lengthen their respective feed lines, whilst the other set shorten their respective feed lines.

4. A device as claimed in any one of the preceding claims wherein the conductive strips are capacitively connected to their respective feed lines.

5. A device as claimed in any one of the preceding claims wherein the body is a rigid RF transparent block.

6. A device as claimed in claim 5 wherein the conductive strips are printed, etched or formed on a surface of the block.

7. A device as claimed in claim 5 wherein the conductive strips are mounted on a circuit that is fixed to the block with the body of the circuit interposable between the block and the printed circuit board.

8. A device as claimed in any one of the preceding claims further including a low friction thin dielectric layer interposed between engaging surfaces of the board and the conductive strips.

9. A phase changing assembly including a printed circuit board for an array of antenna elements, the board having respective antenna feed lines formed thereon, each feed line having an open circuit formed thereon, a phase shifting device as claimed in any one of the preceding claims with the element slidably mounted with respect to the printed circuit board and an actuator for causing the
5 slidable movement.

10. An assembly as claimed in claim 9 wherein the printed circuit board is elongate and the body is movable in a longitudinally axial path.

10 11. A ground tilting antenna array comprising an assembly as claimed in claim 10 as dependent on claim 3 wherein the antenna elements are mounted in a vertical elongate array with the upper antennae connected to feed lines where length is lengthened when the body is moved in the one direction and the lower antenna elements are connected to the feed lines whose length is shortened when the body is moved in the one direction whereby a phase shift is caused
15 along the length of the array.

THIS PAGE BLANK (USPTO)

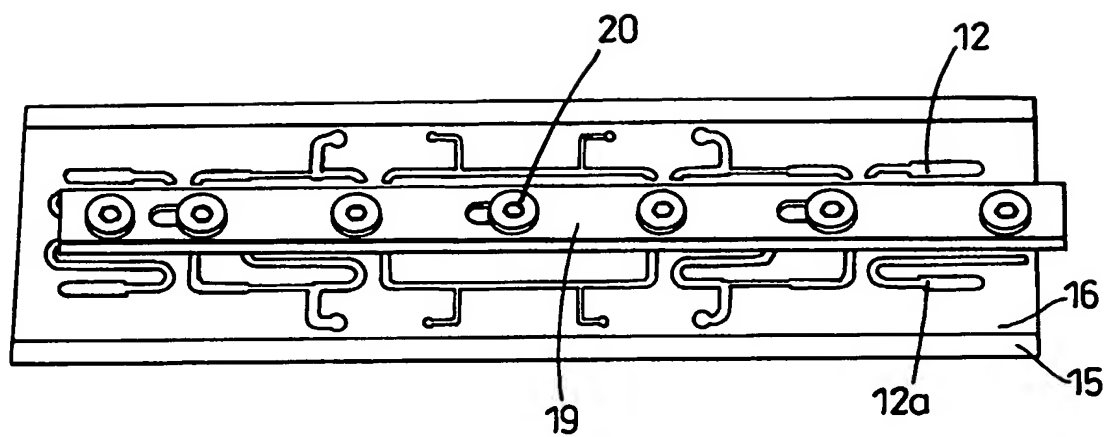


Fig. 1

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840. 84

THIS PAGE BLANK (USPTO)

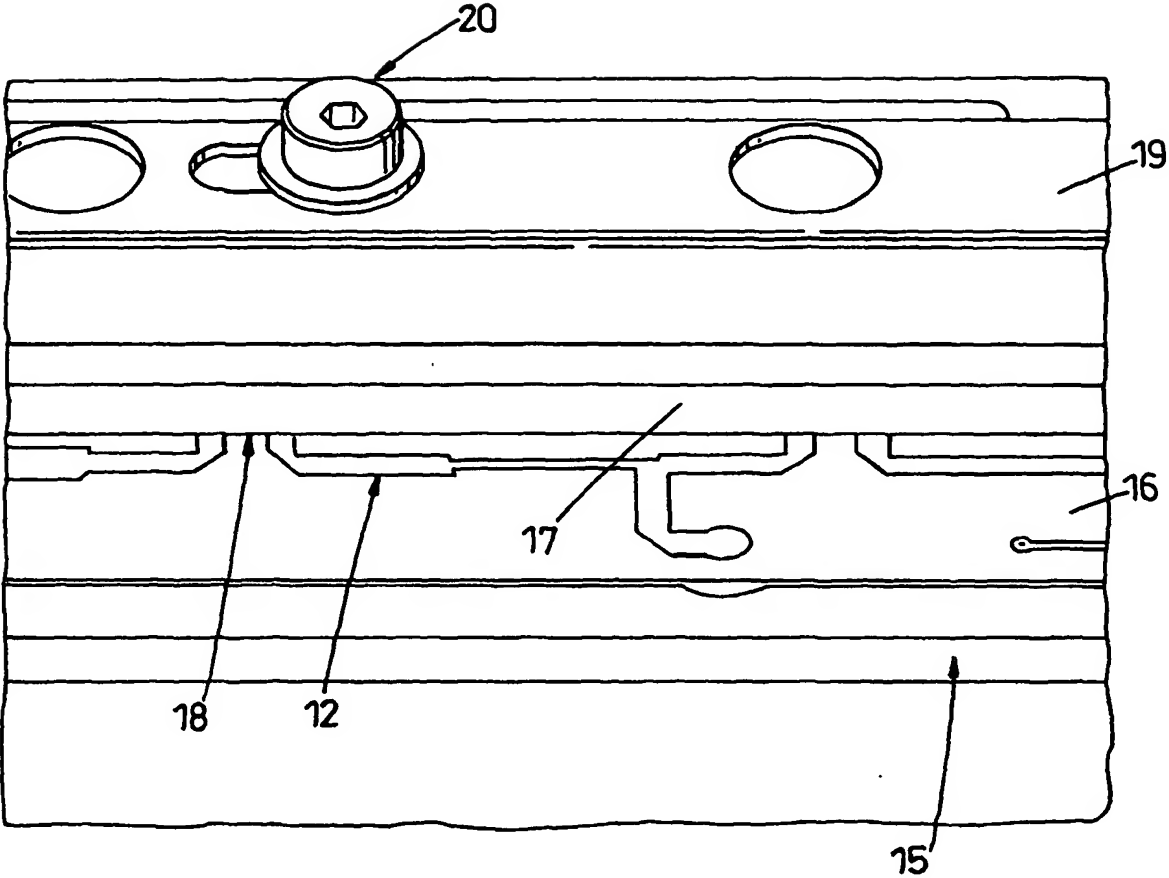


Fig. 2

THIS PAGE BLANK (USPTO)

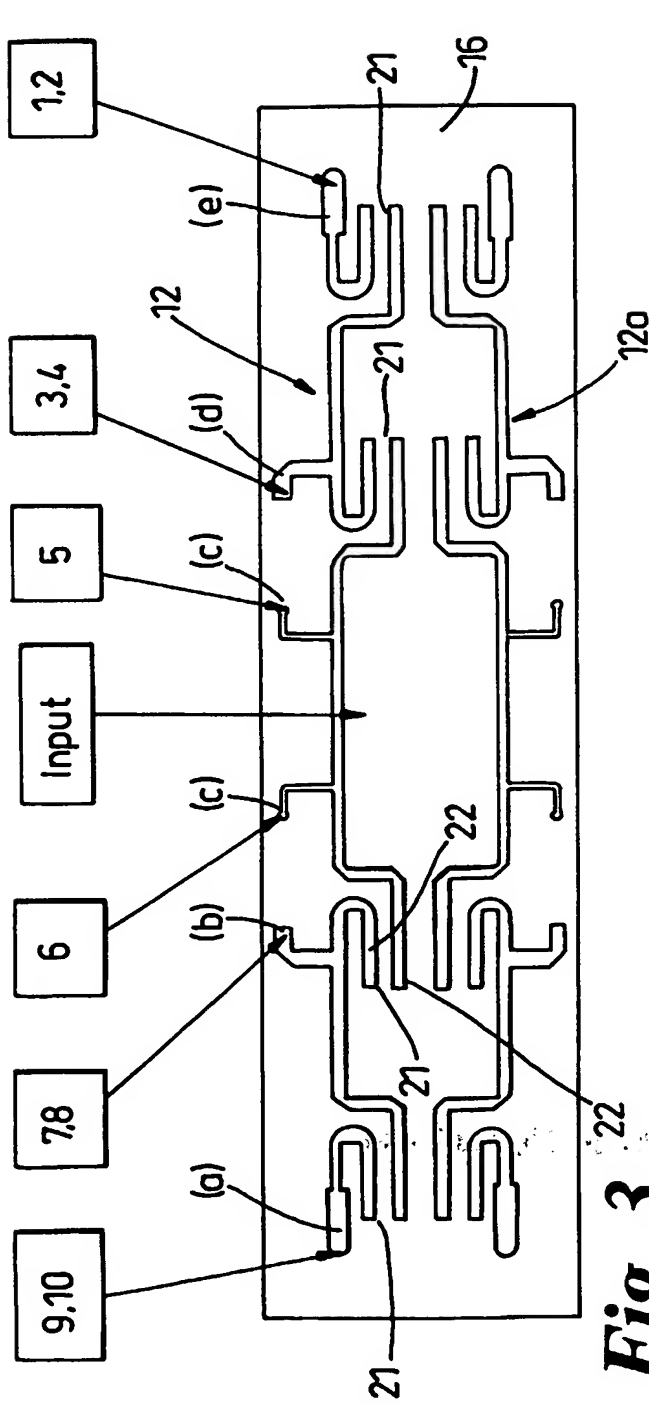


Fig. 3

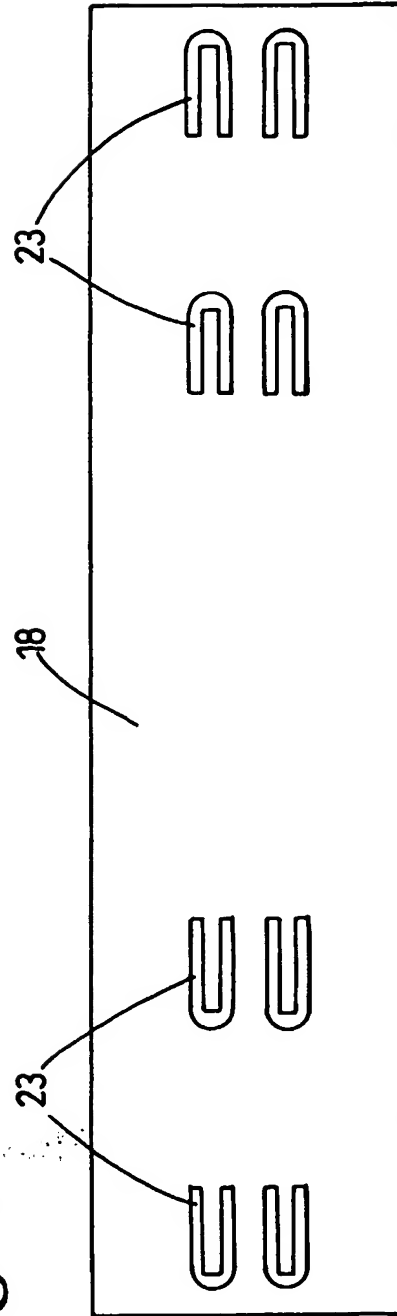
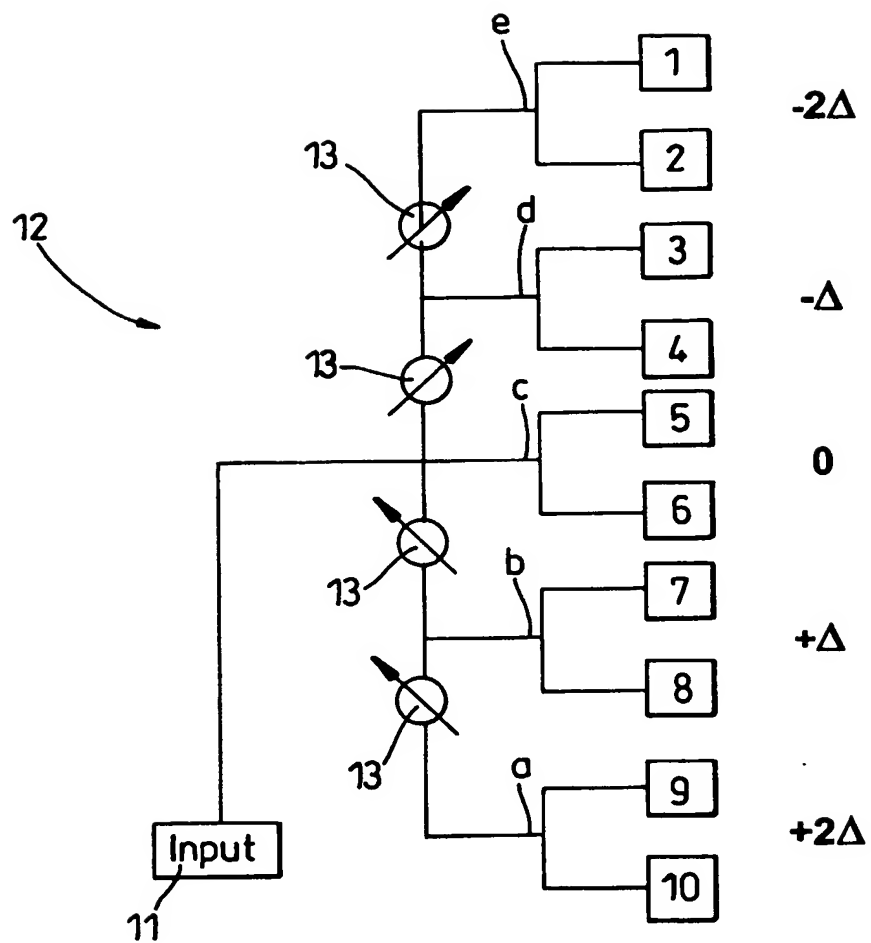


Fig. 4

THIS PAGE BLANK (USPTO)

**Fig. 5**

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

Intern: Application No
PCT/GB 03/02743

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01P1/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01P H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| P,X | WO 03 036759 A (QINETIQ LTD ;THOMAS LOUIS DAVID (GB)) 1 May 2003 (2003-05-01)
abstract; figures 1,6 | 1-11 |
| X | EP 1 033 773 A (LUCENT TECHNOLOGIES INC)
6 September 2000 (2000-09-06)
column 1, line 11 - line 43; figures
2,2A,6,7 | 1,2,4-7,
9,10 |
| X | WO 01 13459 A (GOETTL MAXIMILIAN ;KATHREIN WERKE KG (DE); GABRIEL ROLAND (DE); MA)
22 February 2001 (2001-02-22)
page 9, line 18 -page 11, line 14; figures
2-4 | 1-9 |

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

11 September 2003

Date of mailing of the international search report

18/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kaleve, A

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/GB 03/02743

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|---|-----------------------|
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| Y | DE 198 12 582 A (BOSCH GMBH ROBERT)
23 September 1999 (1999-09-23)
column 1, line 34 -column 4, line 34;
figures 1-3
--- | 1-11 |
| Y | WO 01 03233 A (EHLEN MATHIAS MARTIN ERNEST
;DELTEC TELESYSTEMS INTERNAT LT (NZ);)
11 January 2001 (2001-01-11)
page 12, line 23 -page 13, line 25;
figures 2-5
page 15, line 9 - line 21; figures 7-14
page 22, line 15 -page 23, line 7; figure
15
--- | 1-11 |
| A | US 6 208 222 B1 (SINSKY JEFFREY H)
27 March 2001 (2001-03-27)
column 3, line 15
----- | 1-11 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/02743

| Patent document
cited in search report | | Publication
date | Patent family
member(s) | Publication
date |
|---|----|---------------------|----------------------------|---------------------|
| WO 03036759 | A | 01-05-2003 | WO 03036759 A1 | 01-05-2003 |
| EP 1033773 | A | 06-09-2000 | AU 1844300 A | 07-09-2000 |
| | | | EP 1033773 A1 | 06-09-2000 |
| | | | JP 2000261203 A | 22-09-2000 |
| WO 0113459 | A | 22-02-2001 | DE 19938862 C1 | 15-03-2001 |
| | | | AU 6987400 A | 13-03-2001 |
| | | | BR 0013376 A | 07-05-2002 |
| | | | CA 2382258 A1 | 22-02-2001 |
| | | | CN 1359548 T | 17-07-2002 |
| | | | WO 0113459 A1 | 22-02-2001 |
| | | | EP 1208614 A1 | 29-05-2002 |
| | | | JP 2003507914 T | 25-02-2003 |
| | | | NZ 516849 A | 31-01-2003 |
| DE 19812582 | A | 23-09-1999 | DE 19812582 A1 | 23-09-1999 |
| | | | WO 9949533 A1 | 30-09-1999 |
| | | | DE 59904043 D1 | 20-02-2003 |
| | | | EP 1064691 A1 | 03-01-2001 |
| | | | US 6512426 B1 | 28-01-2003 |
| WO 0103233 | A | 11-01-2001 | AU 4605700 A | 22-01-2001 |
| | | | BR 0011281 A | 05-03-2002 |
| | | | CN 1390369 T | 08-01-2003 |
| | | | EP 1181736 A1 | 27-02-2002 |
| | | | WO 0103233 A1 | 11-01-2001 |
| | | | NZ 515514 A | 29-08-2003 |
| US 6208222 | B1 | 27-03-2001 | NONE | |

THIS PAGE BLANK (USPTO)